


EcoFlex-F


EcoFlex-F

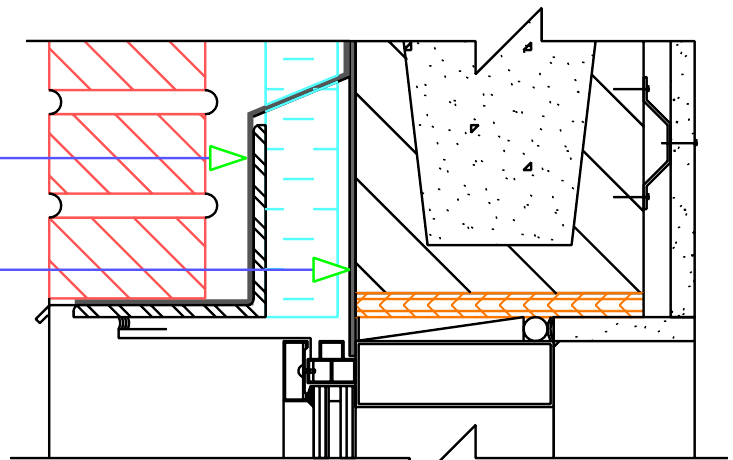

Head

Sealant


Brick Veneer
Air Space
Insulation
EloFlex
Concrete Masonry Unit
Furring
Gypsum Board

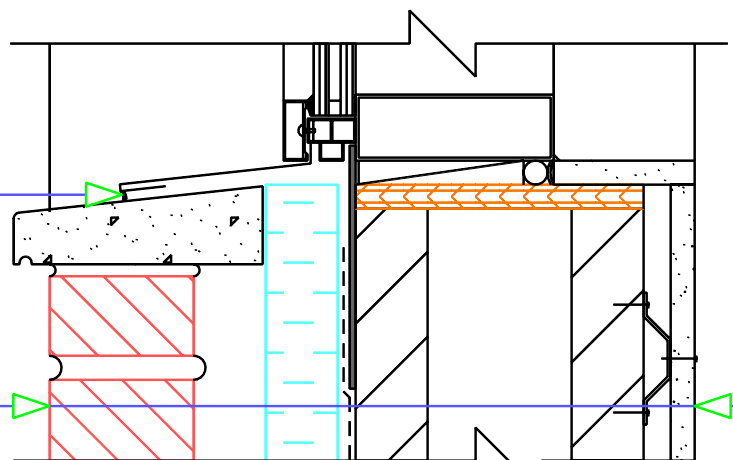

Sill

Notes:

1. A continuous plane of air tightness is achieved when the window frame thermal break and air/vapor barrier are well integrated.
2. Extend EcoFlex-F into window frame and champ tight.

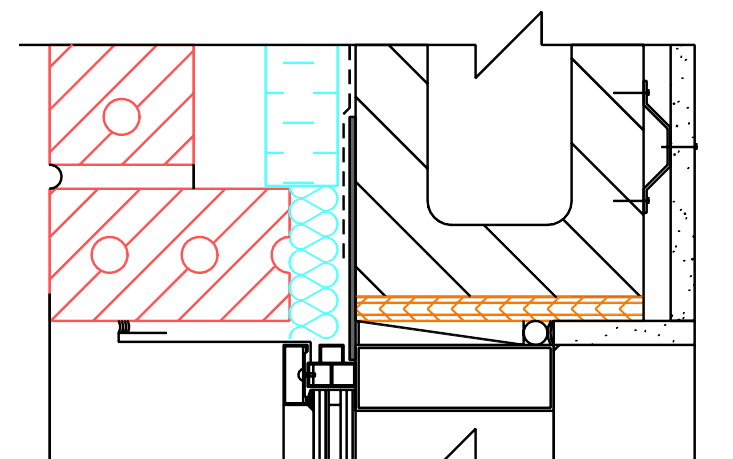

Jamb

WINDOW DETAILS

epro™
Waterproofing Systems



AB-1