


ECOBASE II Waterproofing Membrane

Protects Twice As Much As Other Membranes

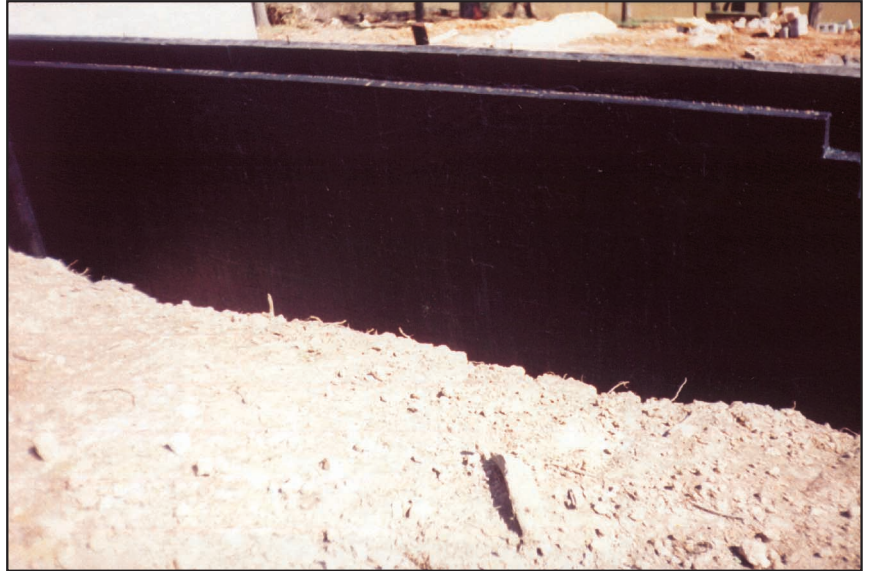

Designed To Be A High Performance And Cost Effective Waterproofing Solution

- A very flexible membrane to handle movement and minor cracking.
- Instant build to ensure proper membrane thickness every time.
- Provides a completely seamless waterproofing membrane.
- Polymerized to provide resistance to chemical breakdown.
- Durability for long term water protection.

TYPICAL UNCURED PROPERTIES	Test Method	Unit	TYPICAL CURED PROPERTIES	Test Method	Unit
Specific Gravity	ASTM D 244	1.00	Initial Cure		10 minutes
Viscosity	ASTM D 1200	>25 centipoise	Final Cure		24-48 hours
PH		12.3	Tensile strength	ASTM D 412-98 A	16 psi
Solids		70%	Elongation	ASTM D 412-98 A	5540%
Flammability	ASTM D 3143	500°F	Moisture Vapor Transmission	ASTM E 96-00-B ..	0.1412 grains/sq ft/hr
Color		Brown to black	Hydrostatic Water Test	ASTM D 751-00	17 psi
Non-Toxic		No Solvents	Bonding	ASTM C 836-76	32 psi
Shelf Life		6 months	Degradation & Water Action Resistance..	ASTM D 2939-94	17 psi .
COVERAGES			Low Temperature Flexibility	ASTM C 836-00 ..	>6.7°C (no breaking)
Walls - good water protection (40-mil dry)		28 sq. ft/gal.	Resistance to Acids	ASTM D 543	
Walls - better water protection (55-60-mil dry)		19 sq. ft/gal.	Hydrochloric / Sulfuric		13%
			Acetic		30%

Packaging

Available in bulk, 330-gal or 275-gal. totes, and 55-gal. drums

APPROVALS: BOCA #2130 (waterproofing)

EPRO SERVICES
P.O. Box 347
Derby, KS 67037 USA



Phone: 800-882-1896
316-262-2513
Fax: 316-262-2529
Web: www.eproserv.com

ECOBASE II Specifications

1. PRODUCT NAME

ECOBASE II

2. MANUFACTURER

EPRO SERVICES
P O Box 347
Derby, KS 67037
PHONE 800-882-1896
FAX 316-794-3451

3. PRODUCT DESCRIPTION

Basic Use: ECOBASE II is designed to be a basic waterproofing and vapor retardant barrier for vertical application to both below grade and above grade surfaces ECOBASE II is to be applied with the unique self contained ECO Sprayer to produce instantaneous, monolithic coating at accelerated rates It may be used as a base coat for other water-based products

Composition: ECOBASE II is a water-based, high solids, highly polymer-modified asphalt emulsion, which exhibits elastomeric qualities to handle minimal expansion and contraction movement and increase its durability

Benefits:

- VOC compliant.
- Non hazardous, non-toxic, and non-flammable.
- Efficient and effective application.
- Cost effective.
- Non-leaching.
- Excellent water proofing.

Limitations:

- Should be applied to clean and dry surfaces.
- Adjacent areas and surfaces should be protected from contact with the product.
- Exposure to UV.
- Should be stored above 40° F.
- A test area should always be done to verify compatibility of substrate with product
- Solvent-based products should not be applied over this product.

4. TECHNICAL DATA

Properties: See chart

Coverages: See chart

• Specification Writer:

Contact EPRO Services before writing specifications on this project. Test information available upon request.

5. INSTALLATION

Preparation: Must include but not limited to:

- All surfaces should be dry and free of loose materials, release oils and other contaminants. These should be removed prior to application by power washing or other suitable methods.
- Repairs: Any cracks, spall or metal protrusion areas should be repaired by trowel application of ECOLINE-T insuring penetration of materials in damaged or cracked area. Large cracks may also require a layer of fiberglass mesh or polyester mat being spanned over crack and ECOLINE-T applied over this to provide additional membrane strength.
- A test should always be done prior to application using the same cleaning preparation and application procedures to be used on the project.

Application:

- Should be applied in accordance with specific application specifications.
- ECOBASE II is to be spray applied with catalyst water by appropriate equipment fitted with specific nozzles (the ECO Spray System) which forms a monolithic water protection coating. Spray application produces an approximate 20 mil build on each pass of spray gun.

Cleaning: Clean all tools with kerosene and/or equivalent.

6. AVAILABILITY AND COST:

Contact the local distributor and/or Authorized Applicator for availability and cost.

7. WARRANTY

Limited Warranty: EPRO warrants this product to be free from defects. EPRO makes no other warranties with respect to this product, express or implied, including without limitation the implied warranties of MERCHANTABILITY OR FITNESS FOR PARTICULAR PURPOSE. EPRO's liability shall be limited in all events to supplying sufficient product to retreat the specific areas to which defective product has been applied. EPRO shall have no other liability, including liability for incidental or resultant damages, whether due to breach of warranty or negligence. This warranty may not be modified or extended by representatives of EPRO or its distributors.

8. MAINTENANCE:

No maintenance required.

9. TECHNICAL SERVICES AND INFORMATION:

Complete technical services and information are available from EPRO Services.

